


# **OIL-FREE TWIN STAGE HIGH POWER COMPRESSOR**

## **MODEL OFT4S39-200**

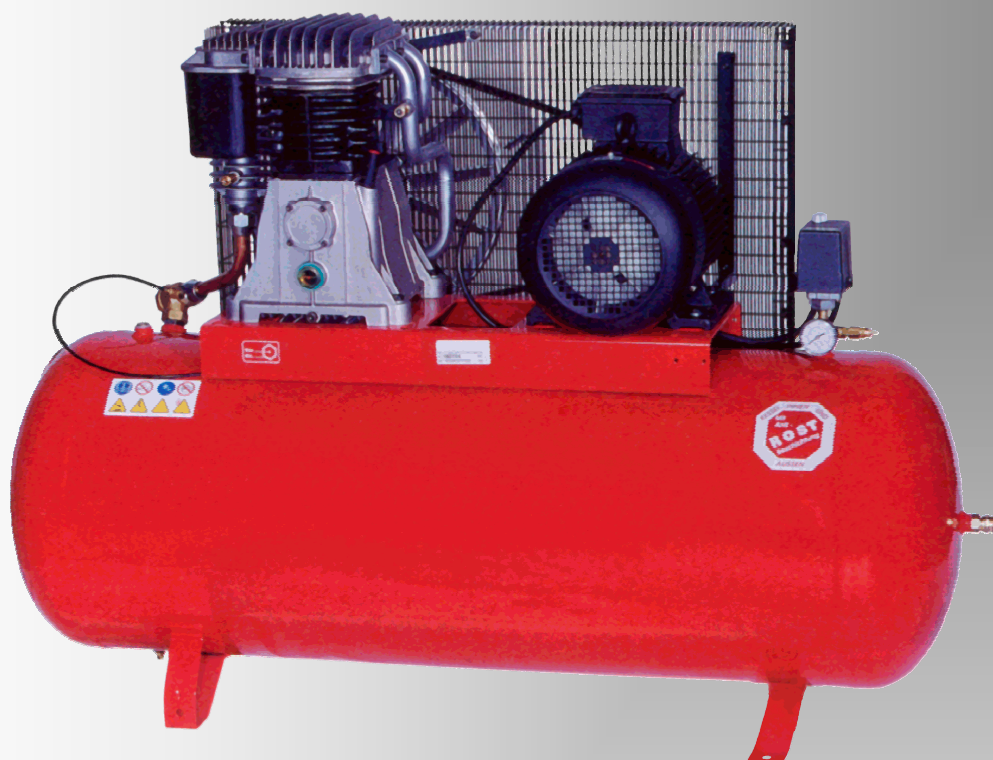

Oil-free, dual cylinders with twin stage compression engine, 4 HP (3 kW) high performances compressor, suited to supply a battery of several standards and/or high pressure SM-8850 WRT machines coupled to pressure boosters.

Extremely silent for its category thanks to its very slow rotational speed (480 rpm); it features long lifetime design and conception, CE approved recipient with internal coating against rust.

### TECHNICAL DATA:

Model:	OFT4S39-200
Recipient Capacity:	200 liters
Motor Power Voltage:	3 Phases 400 VAC / 50 Hz / 10.9 A / 3 kW
Motor Power:	4 HP High lifetime
Pump Cylinder / Stage:	2 Cylinders / Twin stages compression engine
Rotational Speed:	480 rpm
Aspiration Capacity:	540 l/min @ Patm
Nominal / Max. Pressure:	11.0 / 15.0 bar
Dimensions (L, W, H):	150 x 50 x 115 cm
Weight:	125 kg
Noise:	97 dB(A) (low frequency noise)
Performance:	<60 sec. to refill 200 liters recipient from 9.5 to 11.5 bar
Recipient Safety Standard:	CE approved, Thick-walled with internal coating against rust
Included in delivery:	Anti-vibration feet, Output pressure regulator with 5µm filter, Water drain purge valve, Motor protection switch, Safety valve, ISO 6150C Female quick-release air coupling

*ANY CHANGE RESERVED*



**SIGMA ELECTRONIC SA**

GÜTERSTRASSE 27 / P.O. BOX 1119

CH - 2501 BIEL-BIENNE / SWITZERLAND

TEL: +41 32 322 9177 / FAX: +41 32 323 1756

www.sigma-electronic.com      info@sigma-electronic.com